



MODEL 4235/AL4235

PERFORATED SUPPLY DIFFUSER WITH FIBERGLASS PLENUM FOR T-BAR CEILING

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

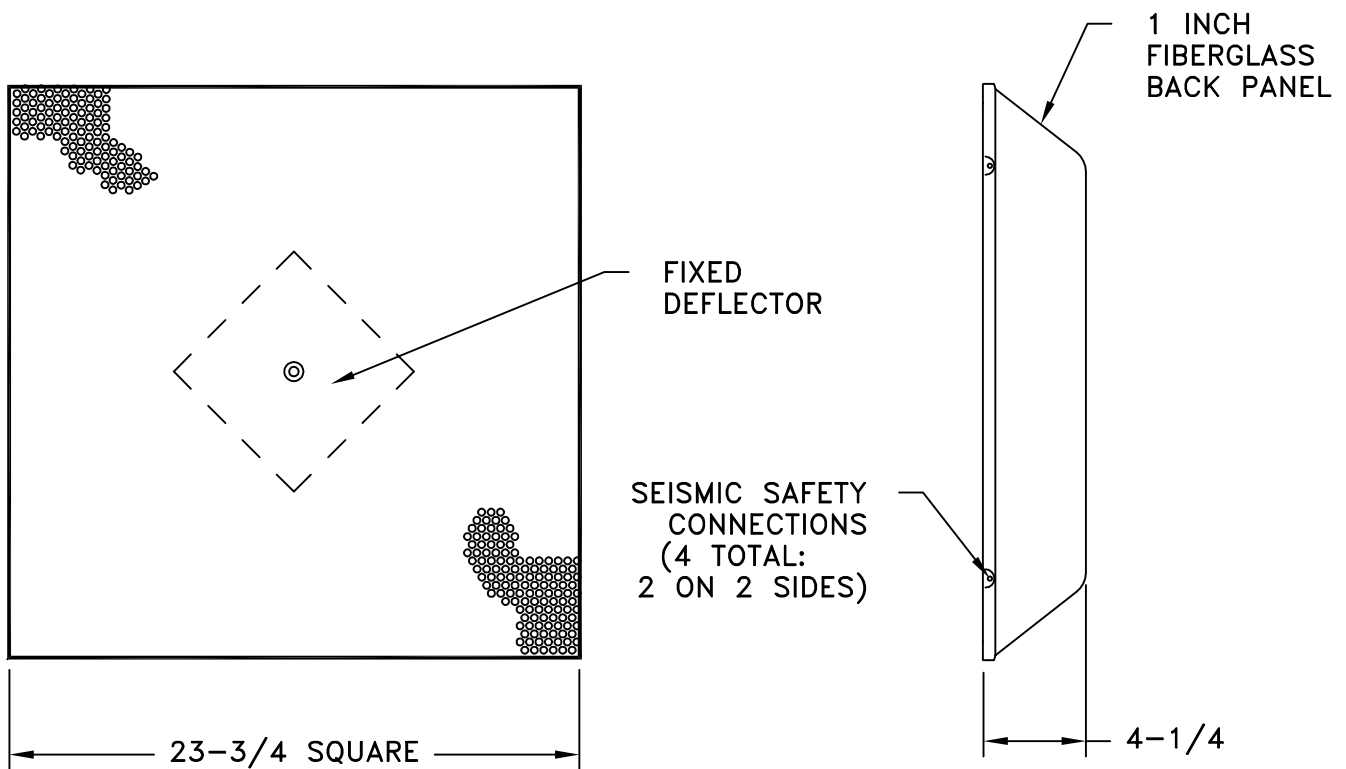

STEEL FACE DETAIL

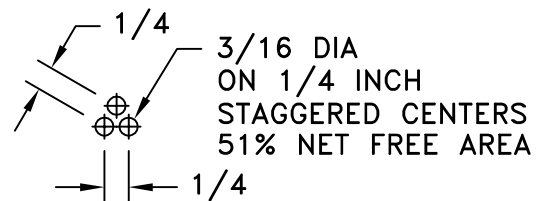

FEATURES

- AL4235 1" fiberglass plenum; R4.2 (R6 Optional)
- AL4235 R6: aluminum perforated face w/ R6 back
- Aluminum foil vapor barrier
- Standard finish is white
- Fiberglass plenum tested in compliance with surface burning characteristics ASTM E-84 and erosion test UL181
- Prescored back accepts 6 to 14 inch spin or tab collars
- Directional deflector included
- Fits standard 24" x 24" lay-in T-Bar

PROJECT: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____

