


MODEL OBD

OPPOSED BLADE DAMPER

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

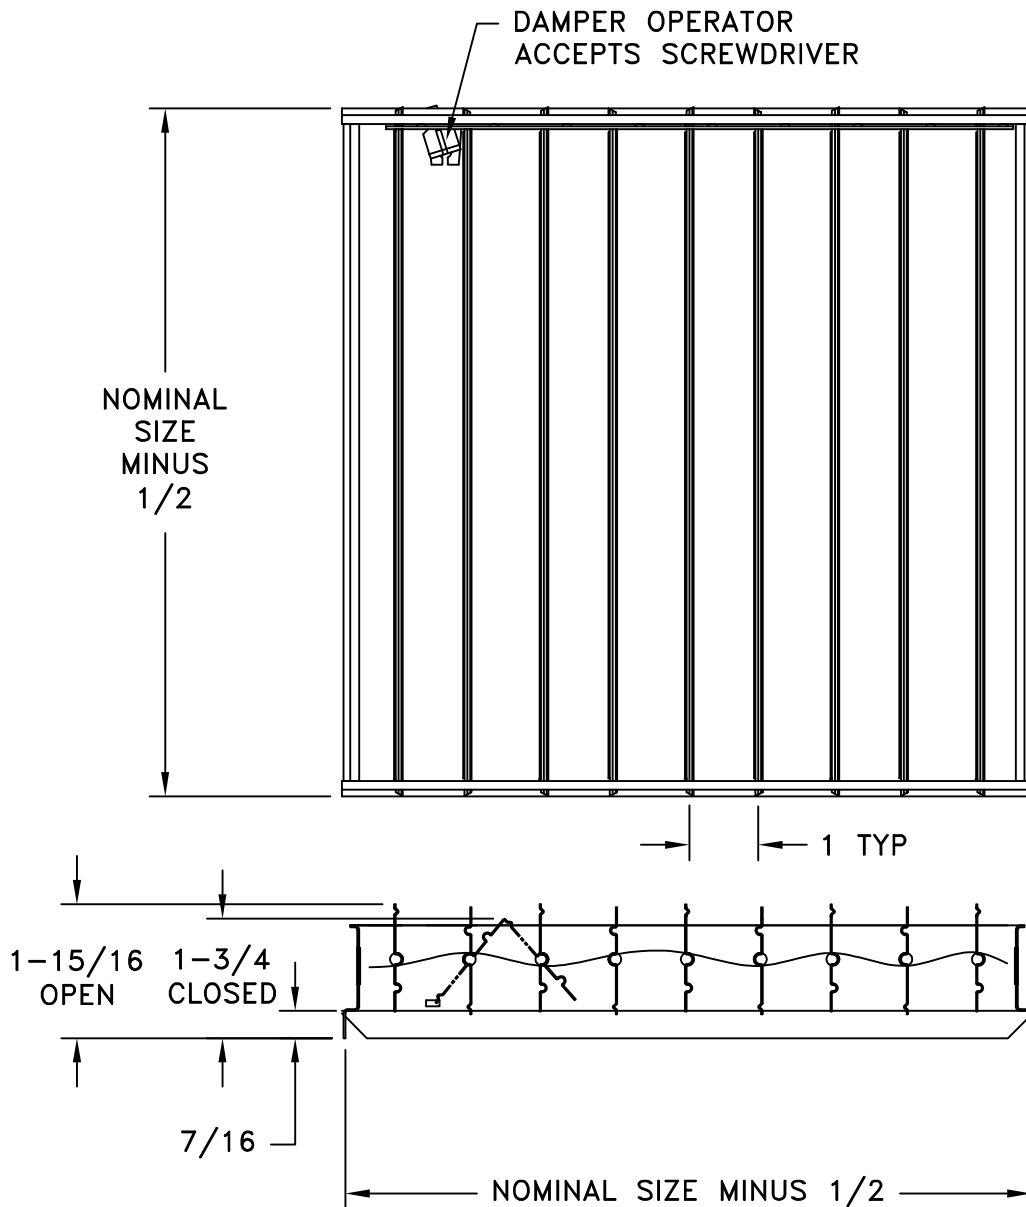

Model OBD is constructed of galvanized steel with vertical blades that simultaneously move in opposite directions to provide uniform air distribution over the entire diffuser face. Tension spring interwoven on blade pivot points permits positive damper setting in any position from fully open to fully closed. Damper blades are screwdriver operated. Extremely shallow depth allows damper to be used in shallow stackheads. Steel construction. Mill finish.

PROJECT: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____
 LOCATION: _____

