
MODEL 900/AL900

SINGLE DEFLECTION SUPPLY WITH MULTI-LOUVER DAMPER

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

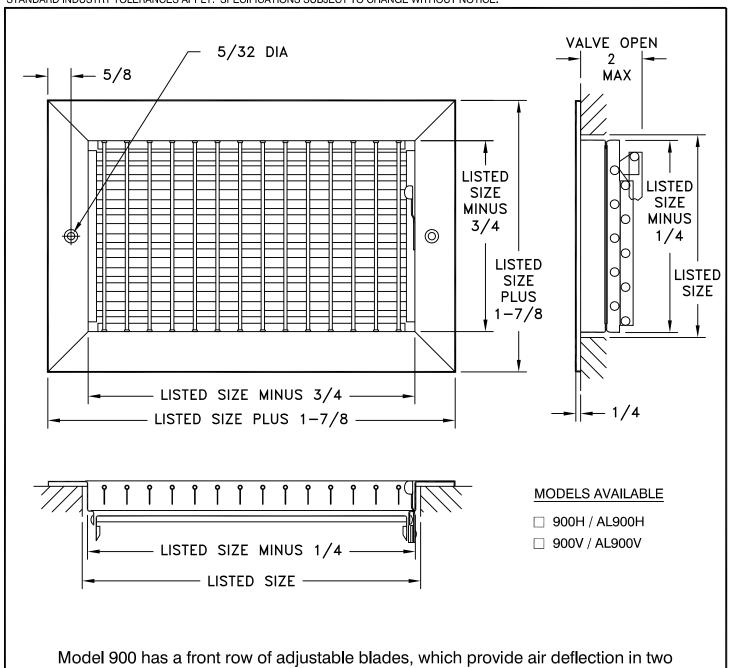

directions. Blades are spaced at 3/4" and are spring stiffened at both ends to permit positive setting without special tools. Lever operated multi-louver damper blades interlock when closed. Steel construction. Standard finish is white.

PROJECT: ARCHITECT: ENGINEER: **CONTRACTOR:** LOCATION:

