


# MODEL 1235

## REMOVABLE FACE


### PERFORATED SUPPLY

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

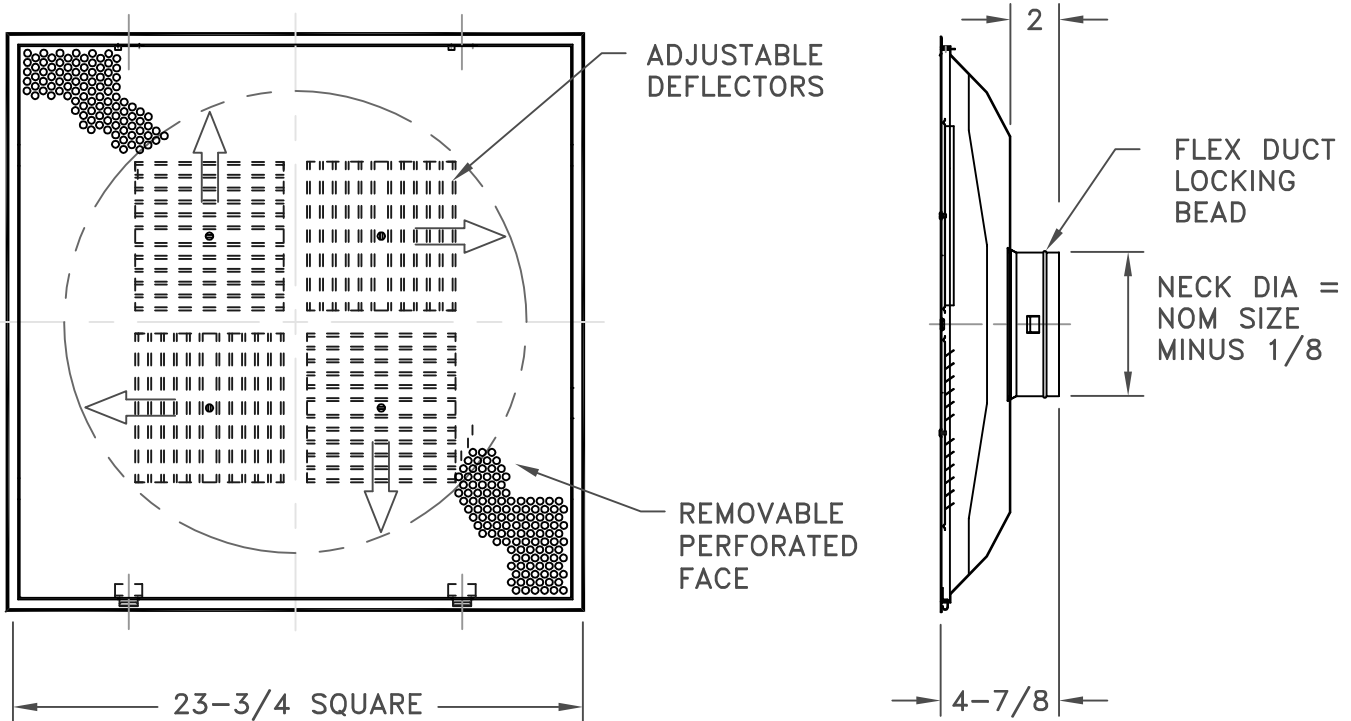

### FACE DETAIL

PERFORATED - 3/16 INCH HOLES  
ON 1/4 INCH  
STAGGERED CENTERS,  
51% FREE AREA



Mode 1235 diffusers have a hinged /latched face to access deflector and damper. Face mounted deflectors can be adjusted. Steel construction. Earthquake tabs are standard. Standard finish is white.

PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

LOCATION: \_\_\_\_\_

