



- FITS STANDARD 2' X 2' T-BAR CEILING SYSTEMS
- AVAILABLE IN 6-14 INCH COLLAR SIZES
(14 INCH COLLAR IS MOUNTED TO THE DIFFUSER AT THE FACTORY)
- OPTIONAL THROUGH THE FACE ADJUSTABLE STEEL NO. R22 BUTTERFLY DAMPER
- FIBERGLASS INSULATION BLANKET WITH FOIL VAPOR BARRIER TO REDUCE CONDENSATION
- FOUR SIESMIC SAFETY CONNECTIONS INCLUDED
- FINISH: WHITE (W) ON THE FACE WITH BLACK POLYESTER PAINT FINISH ON THE BACK PANEL AND ADJUSTABLE DEFLECTOR

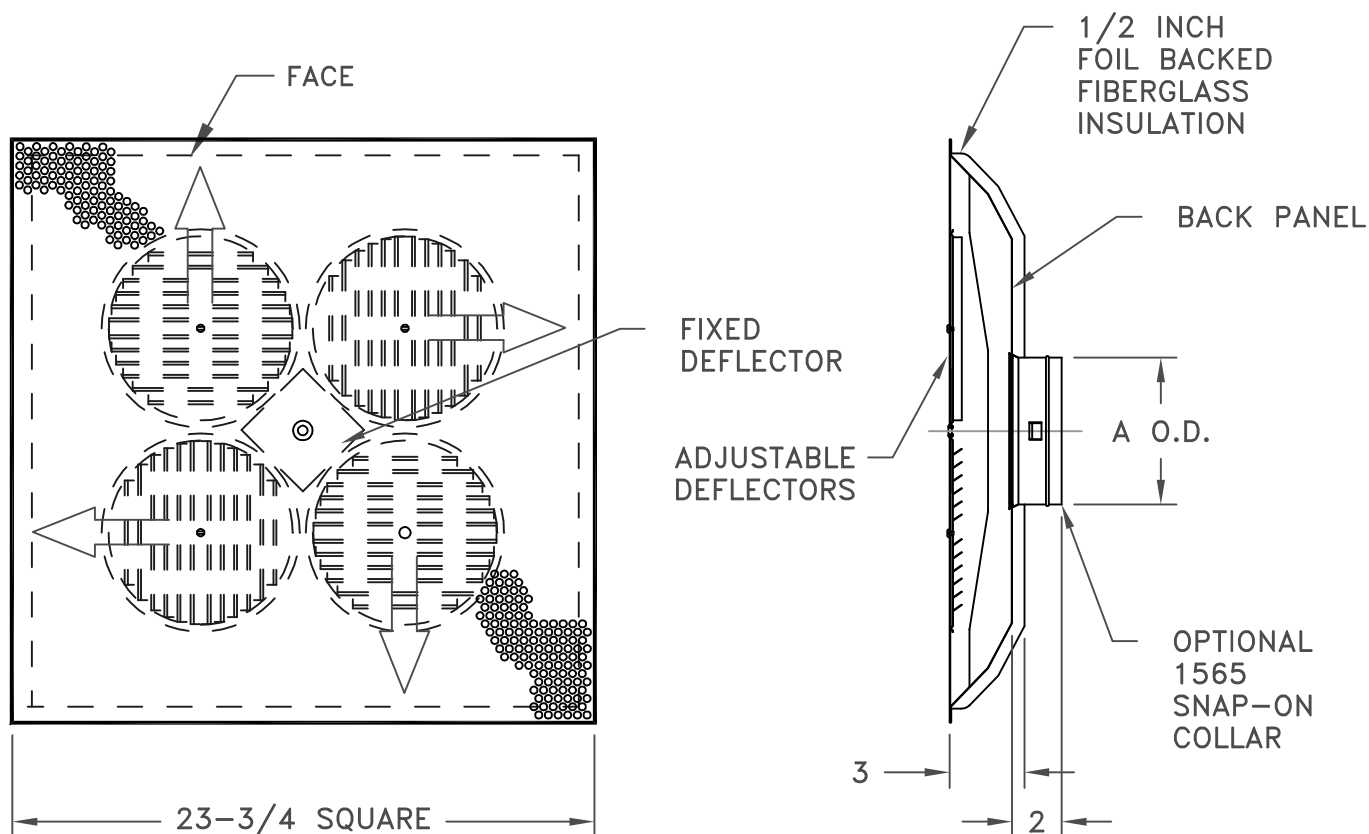

SIZE	A O.D.
6	5-7/8
8	7-7/8
10	9-7/8
12	11-7/8
14	13-7/8

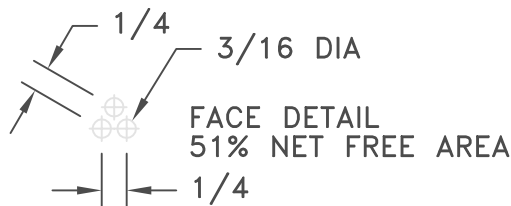

JOB NAME: _____	SUBMITTED BY: _____	DATE: 05/08/2013 PG 43
LOCATION: _____		4250 Steel Perforated Diffuser Adjustable Deflector
ARCHITECT: _____		
ENGINEER: _____		
CONTRACTOR: _____		