


SUBMITTAL DRAWING

- AVAILABLE IN 1-WAY (AL441), 2-WAY (AL442), 3-WAY (AL443),
- 2-WAY CORNER (AL445) AND 4-WAY (AL444) (SHOWN)
- FITS STANDARD 2' X 2' T-BAR CEILING SYSTEM
- EXCLUSIVE PATENTED DEFLECTOR APERTURES
- AVAILABLE IN 6-14 INCH SIZES
- OPTIONAL NO. 1565 SERIES COLLARS SEE DWG # PG 92.2
(14 INCH COLLAR IS MOUNTED TO DIFFUSER AT FACTORY)
- .024 TEMPERED ALUMINUM ALLOY, STUCCO EMBOSSED FACE
- OPTIONAL R22 BUTTERFLY DAMPER AVAILABLE FOR ALL SIZES SEE DWG PG128
- IT IS RECOMMENDED THAT DIFFUSERS INSTALLED IN GRID CEILINGS BE SUPPORTED INDEPENDENT OF THE CEILING HARDWARE
- FINISH: WHITE (W) ON THE FACE
- STEEL BACK PANEL WITH BLACK POLYESTER PAINT FINISH

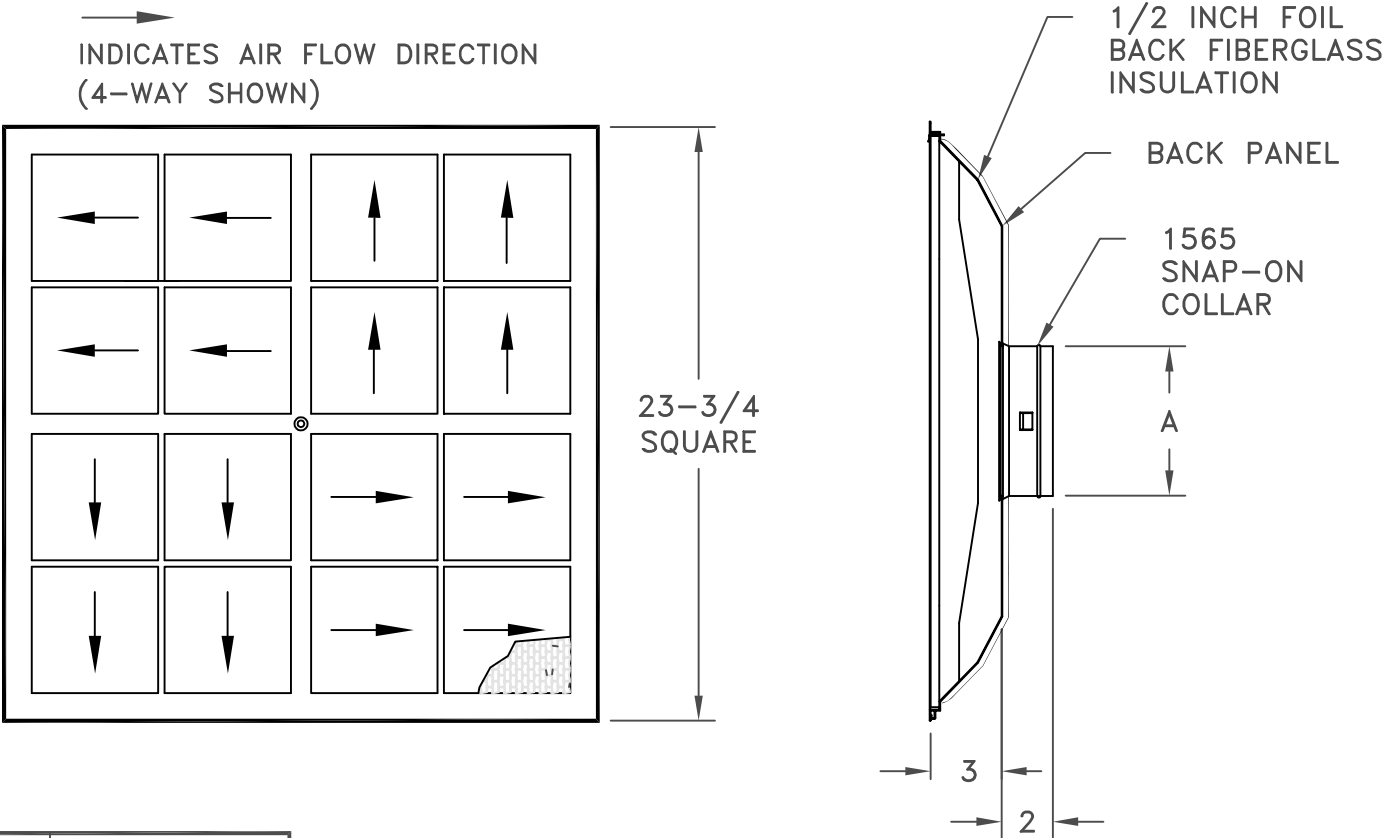

SIZE	A
6	5-7/8
8	7-7/8
10	9-7/8
12	11-7/8
14	13-7/8

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 5/10/2013 | PG 44

AL440[®]
Aluminum
Ceiling Diffuser